

# GREENCOAT® EUROPEAN GUARANTEE

This guarantee complements SSAB's<sup>1</sup> commitments towards its customers given in accordance with the SSAB General Delivery Conditions, ALBIF 2000 valid at the time of delivery. In case of inconsistency with ALBIF 2000, this document shall prevail.

The guarantee is valid for SSAB color coated steels (hereinafter 'Product') determined in table 1 in geographical areas as stated in table 2. In order guarantee to be valid, products need to be on hot dipped galvanized steel with minimum zinc mass 275 g/m<sup>2</sup>, have reverse side coating and have colors and minimum steel thickness, both determined in Product's datasheet available in www.ssab.com/GreenCoat.

SSAB guarantees that there shall be no perforation of the Product, due to oxidation. The technical performance guarantee times are up to 50 years and determined in table 1.

SSAB further guarantees that there will be no significant or uneven alterations in the color (moderate color alterations are possible and not covered by the guarantee) and that the coating will not scale, crack or peel off from the Product. Product service life is significantly longer than the guarantee time. The aesthetical performance guarantee times are up to 25 years and determined in table 1.

The guarantee periods are counted from the date of delivery to the customer by SSAB or after 18 months from the date of manufacturing, whichever comes first.

#### **GUARANTEE PROVISIONS**

- In order for the guarantee to apply, damaged area in the color coating must be more than 5% of the pane of the roof or individual wall.
- The guarantee shall only be valid where a Product is used for an application recommended by SSAB.

- The customer must always observe SSAB's instructions and recommendations for inspection and maintenance and the Product datasheet. The datasheet and instructions are published on the SSAB website (www.ssab.com/GreenCoat) and are also available from SSAB technical support upon request.
- Storing, packing and handling of the Products must be performed in accordance with SSAB guideline "Storage guidelines for GreenCoat<sup>®</sup> color coated steels" (www.ssab.com/GreenCoat).
- The guarantee does not apply:
  - to reverse side coating.
  - to damage caused by corrosion originating from the reverse side of the Product.
  - if the pitch of a roof or another surface is less than 1:16 (3.6°) or if water cannot run off freely from all surfaces.
  - if the Product has been damaged chemically or mechanically.
  - Limited edge peel on bare cut edges can occur from normal weathering but this will not effect the functionality of the product.
    - In the unlikely event of premature edge peel occurring SSAB will undertake an inspection and if it is found to be excessive will carry out suitable remedial repair to ensure the product functions for the remaining period of the guarantee.
    - The definition of a cut edge is one that has been manufactured in a factory controlled environment using industry standard shearing techniques. Cut edges generated by alternative processes or on-site should be subject to best practice, including painting where necessary.

1) SSAB refers to SSAB EMEA AB or SSAB Europe Oy or their affiliate companies, depending on which company is the vendors of the Product.





- to the use of the Product in atmospheric environment with high pollution or substantial effect of chlorides or subtropical zone e.g. polluted urban areas, industrial areas, coastal areas with high salinity or, exposure to strong effect of de-icing salts (C4 and C5 according to ISO 9223).
- to Product being in constant contact with water, plaster, wet wood or soil, or where corrosive chemicals or fumes, condensation, ashes, unhardened cement, cement dust or manure may affect the surface.
- to damage caused by corrosive output from roof's overhead structures like runoffs from chimney caps and bird excrement accumulations resulting from antennas.
- if the Product has been stored outside without shelter before its installation.
- if unsuitable fasteners and sealants for the relevant corrosiveness class are used.
- if the seam sealant has damaged the sheet surface.
- if damage caused to the color coating of the Product during processing has not been duly repaired by professional touch-up painting without delay.
- if the Product has been damaged by improper processing at subsequent manufacturer or during or after the assembly.
- if the pitch of a rainwater gutter is less than 2.5 mm/m or if a Product with epoxy instead of double-sided coating is being used as part of a rainwater system.
- if the Product has been cut by using an angle grinder with a cut-off disc, or any other device that produces heat.
- if accumulations of dirt or other deposits and rain sheltered areas have not been cleaned annually in a professional way.
- if the regular inspection and maintenance have not been made and documented.
- for areas where solar panels are glued or directly attached to the surface or where the panels are installed in such a way that cleaning and maintenance cannot be carried out.
- if the damage or failure originates from any modification of the original product that allows the solar panels to be attached to the Product.
- guarantee is not valid for different color aging under solar panel versus 'uncovered' surface.

#### **REMEDY PROVISIONS**

- In case of claims being justified under this guarantee, SSAB shall at its sole option either:
  - give full or partial refund, taking into consideration the defect and age of the Product,
  - repair the Product by repainting the defective sheet, or
  - replace the Product by delivering new Product free of charge to the buyer.
- The above remedies shall be performed within SSAB's product range available at the time of remedy, which might cause differences in color compared to the original Product.
- The replacement, repair or refinishing of the Product shall not extend the term of the original guarantee.
  - If the customer repaints the Product, the aesthetic warranty period ends. The repainted surface is not manufactured by SSAB and therefore does not come with a GreenCoat<sup>®</sup> guarantee. If the Product is repainted by SSAB, it doesn't reduce the original guarantee period.
- SSAB's liability under this guarantee is limited to the invoiced value of defective Products.
- Unless otherwise stated in this guarantee, SSAB shall not be responsible for direct or indirect losses or damages due to defect in the Product under any circumstances.
- Only claims by SSAB's direct customers as beneficiaries of this guarantee shall be considered. The customer shall handle independently claims from its own customers.
- A claim must be accompanied by documentation to identify the Product; an order number, coil number/s and a copy of the invoice or another purchase document is needed.
- The complaint must arrive to SSAB as soon as possible and latest within 30 days after the discrepancy was noticed or should have been noticed and in any case within the guarantee period.




#### **SPECIFIC PROVISIONS**

The laws of the seller's country of domicile shall govern this guarantee. The guarantee shall be valid for all Products sold by SSAB after 1.4.2024.

The present guarantee is written and stipulated in English. It may be translated into the language of some of the countries within the geographical scope of application of the guarantee. In case of any inconsistency between the English text and a translation into any other language, the English version shall always prevail.

This document version will replace the earlier version dated 14.2.2022.

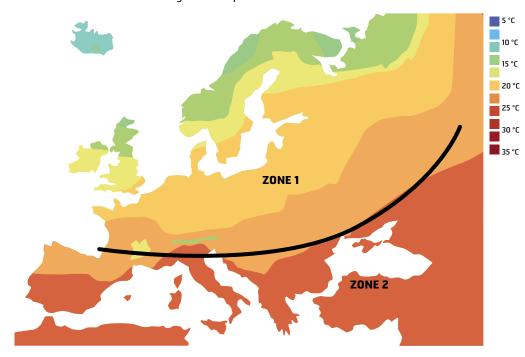

#### FIGURE 1 Zones with different guarantee periods.





### **TABLE 1** Technical and aesthetical performanceguarantee times in years for SSAB's color coated steels.

	ZONE 1 **		ZONE 2	
Product*	Technical performance	Aesthetical performance	Technical performance	Aesthetical performance
GreenCoat PLX Pural BT	50	25	45	20
GreenCoat Pural BT	50	25	45	20
GreenCoat Hiarc Max	50	25	45	20
GreenCoat PLX Pro BT	50	20	45	15
GreenCoat Hiarc	40	25	35	20
GreenCoat Pro BT	40	20	35	15
GreenCoat Mica BT	40	20	35	15
GreenCoat Crown BT	40	15	35	10
GreenCoat Cool	40	15	35	10
GreenCoat RWS Pural BT	30	20	25	15
GreenCoat RWS Pural	30	20	25	15
GreenCoat RWS Pro BT	30	15	25	10
GreenCoat RWS Pro	30	15	25	10
Rough Matt Polyester	40	15	35	10
Polyester	30	10	25	5
P200***	30	10	-	-

\* Min zinc mass 275 g/m<sup>2</sup>, color coating both sides, colors and min steel thicknesses according to datasheet.

\*\* As the UV radiation is dependent on and increasing at higher altitude, any object situated more than 900m above the sea level shall be under the same guarantee condition as are valid for Zone 2.

\*\*\* The guarantee for P200 is valid provided that the product is used as wall or roof cladding in Norway and Iceland. Guarantee shall not be valid otherwise.

## **TABLE 2** The guarantee is limited to Productsused in any of the following countries.

Country	Zone**	Country	Zone**
Albania	2	Liechtenstein	1
Andorra	2	Lithuania	1
Armenia	2	Luxembourg	1
Austria	1	North	2
Azerbaijan	2	Macedonia	2
Belarus	1	Malta	2
Belgium	1	Moldova	1
Bosnia and	2	Monaco	2
Herzegovina	L	Montenegro	2
Bulgaria	2	Netherlands	1
Croatia	2	Norway	1
Cyprus	2	Poland	1
Czech	1	Portugal	2
Republic	T	Romania	1
Denmark	1	San Marino	2
Estonia	1	Serbia	2
Finland	1	Slovakia	1
France	1	Slovenia	2
Georgia	2	Spain	2
Germany	1	Sweden	1
Greece	2	Switzerland	1
Hungary	1	Tajikistan	2
Iceland	1	Turkey	2
Republic	1	Ukraine	1
of Ireland	1	Uzbekistan	2
Italy *	2	United	1
Kazakhstan	2	Kingdom	
Kyrgyzstan	2	Vatican City 2	
Latvia	1		

\* Italy, South Tirol: Zone 1. Italy, Other areas: Zone 2

\*\* As the UV radiation is dependent on and increasing at higher altitude, any object situated more than 900m above the sea level shall be under the same guarantee condition as are valid for Zone 2.